



### 产品标识 Product Identification

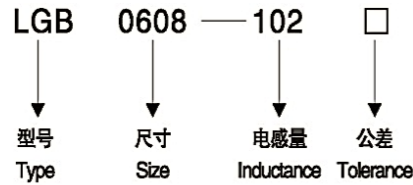

### 应用领域 APPLICATIONS

- a) 电子镇流器、节能灯。  
Electronic ballast, Energy-saving lamps.
- b) 电视机、音响设备等家用电器。  
Television & Audio appliances.
- c) 不间断电源、EMC、滤波器。  
UPS, EMC filter.

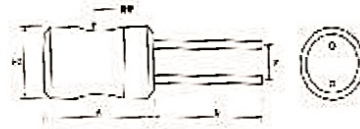

### 产品特点 FEATURES&APPLICATIONS

- a) 功率大、体积小，节省安装空间。  
High power, small size, saving installation space.
- b) 分布电容小，自共振频率高。  
Small distributed capacitance high resonance frequency.
- c) 用PVC或UL热缩套管保护。  
Using PVC or UL heat-shrinkable tubing for protection.

### 外形尺寸 Dimensions(mm)

规格 Part No.	外形尺寸 DIMENSIONS(mm)			
	Amax	Bmax	Cmax	P
LGB0304	5.0	5.0	4.0	1.5±0.5
LGB0406	7.0	5.0	5.0	2.0±1.0
LGB0507	8.5	5.0	6.0	2.5±1.0
LGB0608	9.5	5.0	7.0	3.0±1.0
LGB0709	10.5	5.0	8.0	4.5±1.0
LGB0810	11.5	5.0	9.0	5.0±1.0
LGB0912	13.5	5.0	11.5	6.0±1.0
LGB1012	13.5	5.0	12.5	6.0±1.0
LGB1016	18.5	5.0	12.5	6.0±1.0

### 电气特性 Electrical Characteristics

规格 Part No.	电感量范围 Inductance	额定电流范围 IDC
LGB0304	1 μH~27mH	1A~30mA
LGB0406	1 μH~10mH	1.8A~28mA
LGB0507	1 μH~33mH	3.6A~15mA
LGB0608	1 μH~47mH	3.7A~22mA
LGB0709	1 μH~47mH	3.6A~24mA
LGB0810	5 μH~100mH	3.4A~20mA
LGB0912	10 μH~100mH	4.3A~25mA
LGB1012	33 μH~150mH	2A~16mA
LGB1016	51 μH~200mH	2.4A~18mA